


## RC Type Core

• 命名表示 / Ordering Core System

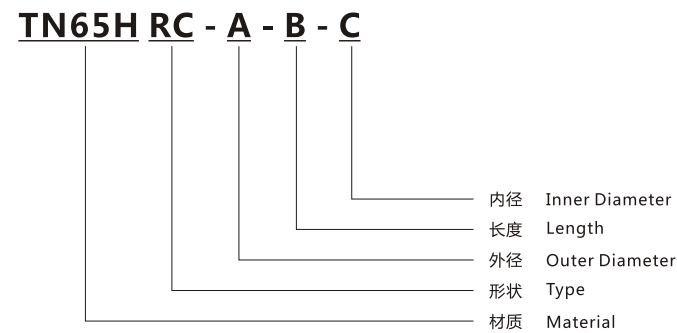

- 适用材质 / Available Material : TN65B/ TN80G/ TN100B/ TN130G
- 使用范围 / Application :  
主要适用于通讯、计算机等用内外主电源滤波  
Internal and external main power filter used for communication and computer

## RC Type Core

型号 TYPE	尺寸 Dimensions ( mm )						图例 FIG
	A1	A2	B	C	D	D2	
RC-10-20-5	10.00 ±0.3		20.00 ±0.5	4.90 ±0.4	4.40 ±0.4		2
RC-12-15-7.3	12.00 ±0.3		15.00 ±0.3	7.30 ±0.3	5.50 ±0.15		1
RC-13-23-7	13.00 ±0.5		23.00 ±0.5	7.00 ±0.4	6.00 ±0.2		1
RC-16-28-9	16.00 ±0.3		28.00 ±0.5	9.00 ±0.2	7.50 ±0.15		1
RC-16-29.8-9	16.00 ±0.3		29.80 ±0.5	9.00 ±0.2	8.10 ±0.1		1
RC-17-28-11	17.00 ±0.3		28.00 ±0.5	11.00 ±0.2	8.45 ±0.15		1
RC-26-29-13	26.00 ±0.5		29.00 ±0.5	13.00 ±0.4	13.00 ±0.2		1
RC-36-32-19	36.00 ±0.6		32.00 ±0.6	19.00 ±0.4	18.15 ±0.3		1
RC-15-28.9-6.6	15.00 ±0.25		28.90 ±0.5	6.60 ±0.3	7.50 ±0.15		3
RC-18.7-28.9-10.15	18.70 ±0.5		28.90 ±0.5	10.15 ±0.3	9.40 ±0.15		3
RC-25.9-28.9-13.05	25.90 ±0.5		28.90 ±0.5	13.05 ±0.3	12.95 ±0.25		3
RC-27-30-18	27.00 ±0.5		30.00 ±0.5	18.00 ±0.4	4.40 ±0.15	3.00 ±0.15	4
RC-32-12-26	32.00 ±0.5		12.00 ±0.2	26.00 ±0.4	4.30 ±0.15	3.30 ±0.15	4
RC-42-22-34.5	42.00 ±1.0		22.00 ±0.3	34.50 ±0.5	4.30 ±0.15	3.00 ±0.15	4
RC-64-16-52	64.00 ±1.0		16.00 ±0.25	52.00 ±1.0	6.40 ±0.15	5.00 ±0.15	4
RC-11-21-7	11.00 ±0.3		21.00 ±0.5	7.00 ±0.2	3.90 ±0.15		5
RC-16-28-8.5	16.00 ±0.3		28.00 ±0.5	8.50 ±0.2	4.90 ±0.15		5
RC-26-29-15	26.00 ±0.5		29.00 ±0.5	15.00 ±0.4	8.40 ±0.25		5